


# 201 SERIES

## THREE FINGER CONTACT CLIPS

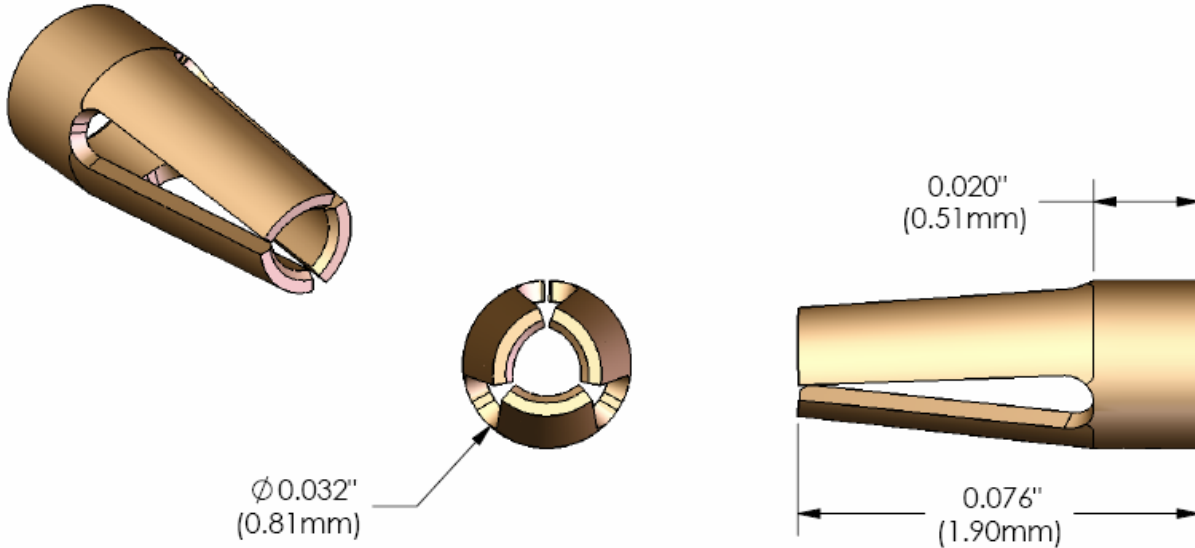

### TECHNICAL PRODUCT DATA

WEISS-AUG PART NUMBER	CLIP TYPE	TEST PIN DIAMETER	OPERATING RANGE PIN DIAMETER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE	MATERIAL
1-2-3001-20101	201	0.018" (0.457mm)	0.015" - 0.020" (0.38mm - 0.51mm)	140g	35g	C17200
1-2-3001-20102	201L	0.018" (0.457mm)	0.015" - 0.020" (0.38mm - 0.51mm)	60g	20g	C17200
1-2-3001-20103	201SL	0.018" (0.457mm)	0.015" - 0.020" (0.38mm - 0.51mm)	35g	15g	C17200

#### NOTES:

1. ALL FORCE DATA RELATES TO UNPLATED CLIPS.
2. TESTS PERFORMED WITH POLISHED STEEL BULLET NOSE PINS.
3. ALL CLIPS MANUFACTURED FROM BeCu ALLOY C17200 1/2 HARD MATERIAL, HEAT TREATED POST FORMING.

SUFFIX DEFINITIONS: "L" = LOW FORCE "SL" = SUPER LOW FORCE "UL" = ULTRA LOW FORCE "H" = HEAVY FORCE



### WEISS-AUG

Precision Manufacturing by Innovative Design  
Stamping, Insert Molding and Assembly

220 Merry Lane • East Hanover, NJ 07936 • USA

T. 973.887.7600 • F. 973.887.8109 • www.weiss-aug.com



QUALITY IS OUR  
BUSINESS

